

# The SOLID Principles

Klaus Iglberger, Core C++, May 2020

[klaus.iglberger@gmx.de](mailto:klaus.iglberger@gmx.de)

C++ Trainer since 2016

Author of the  C++ math library

(Co-)Organizer of the Munich C++ user group

Regular presenter at C++ conferences


Email: [klaus.iglberger@gmx.de](mailto:klaus.iglberger@gmx.de)



**Klaus Iglberger**


# Software Design

---

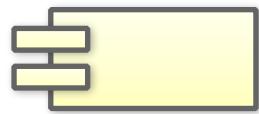


# Software Design

---

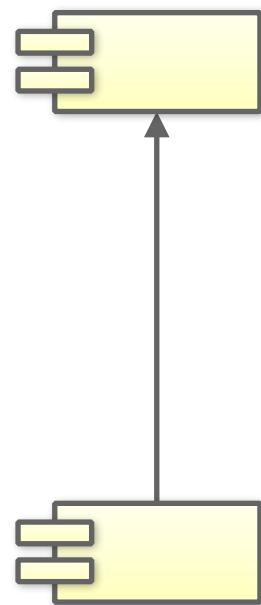


# Software Design

---

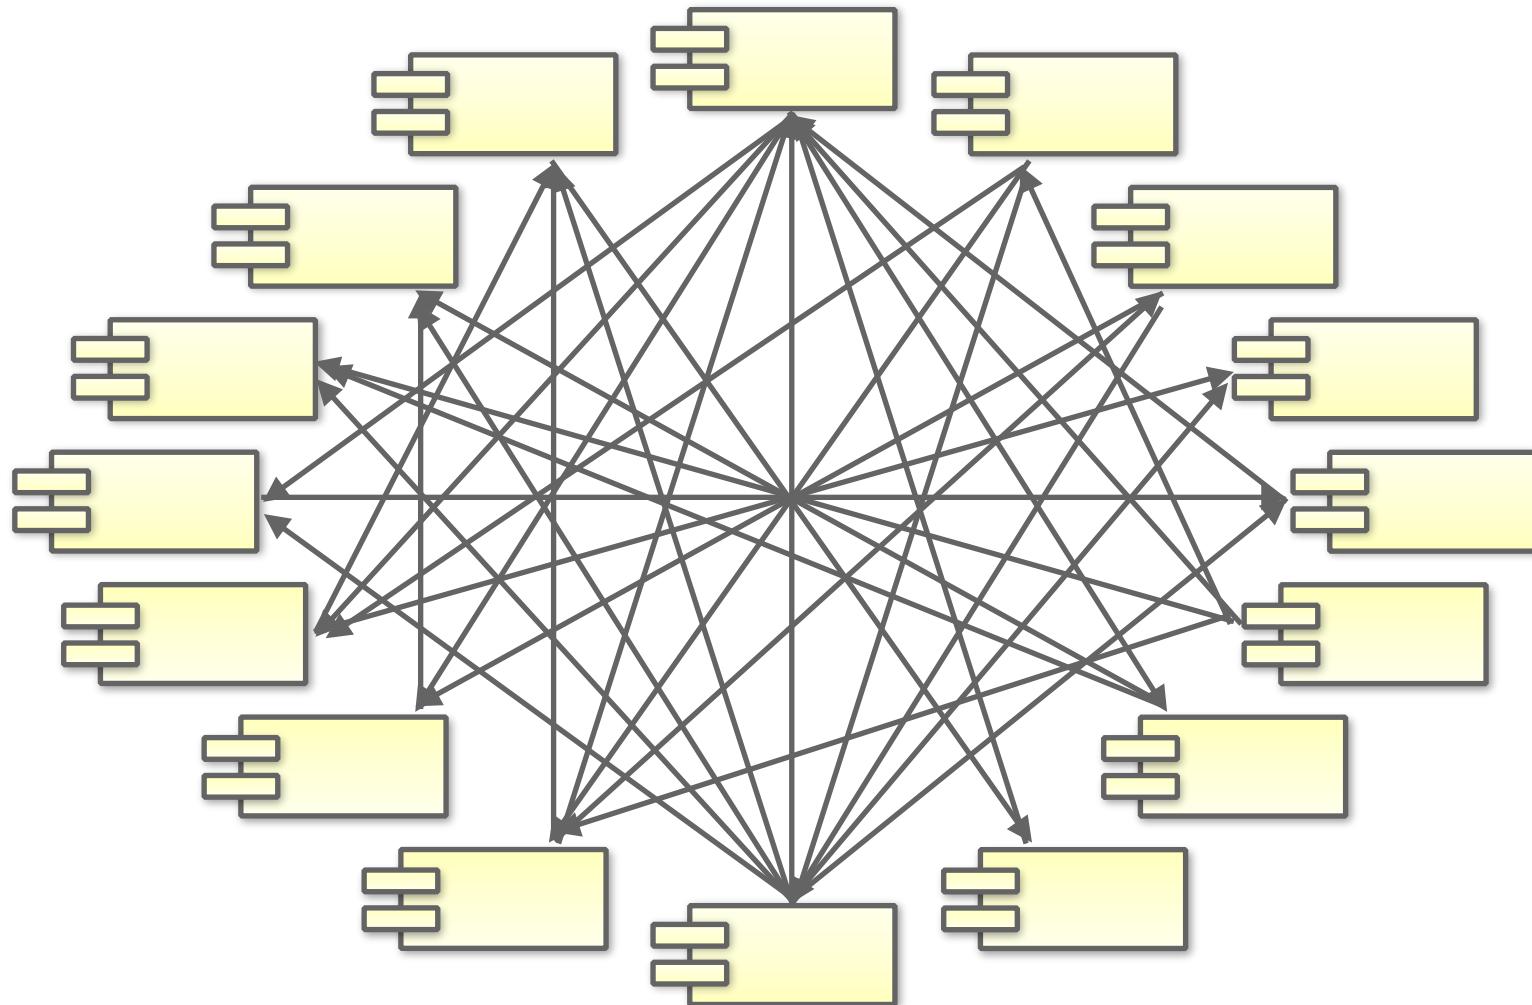

# Software Design

---

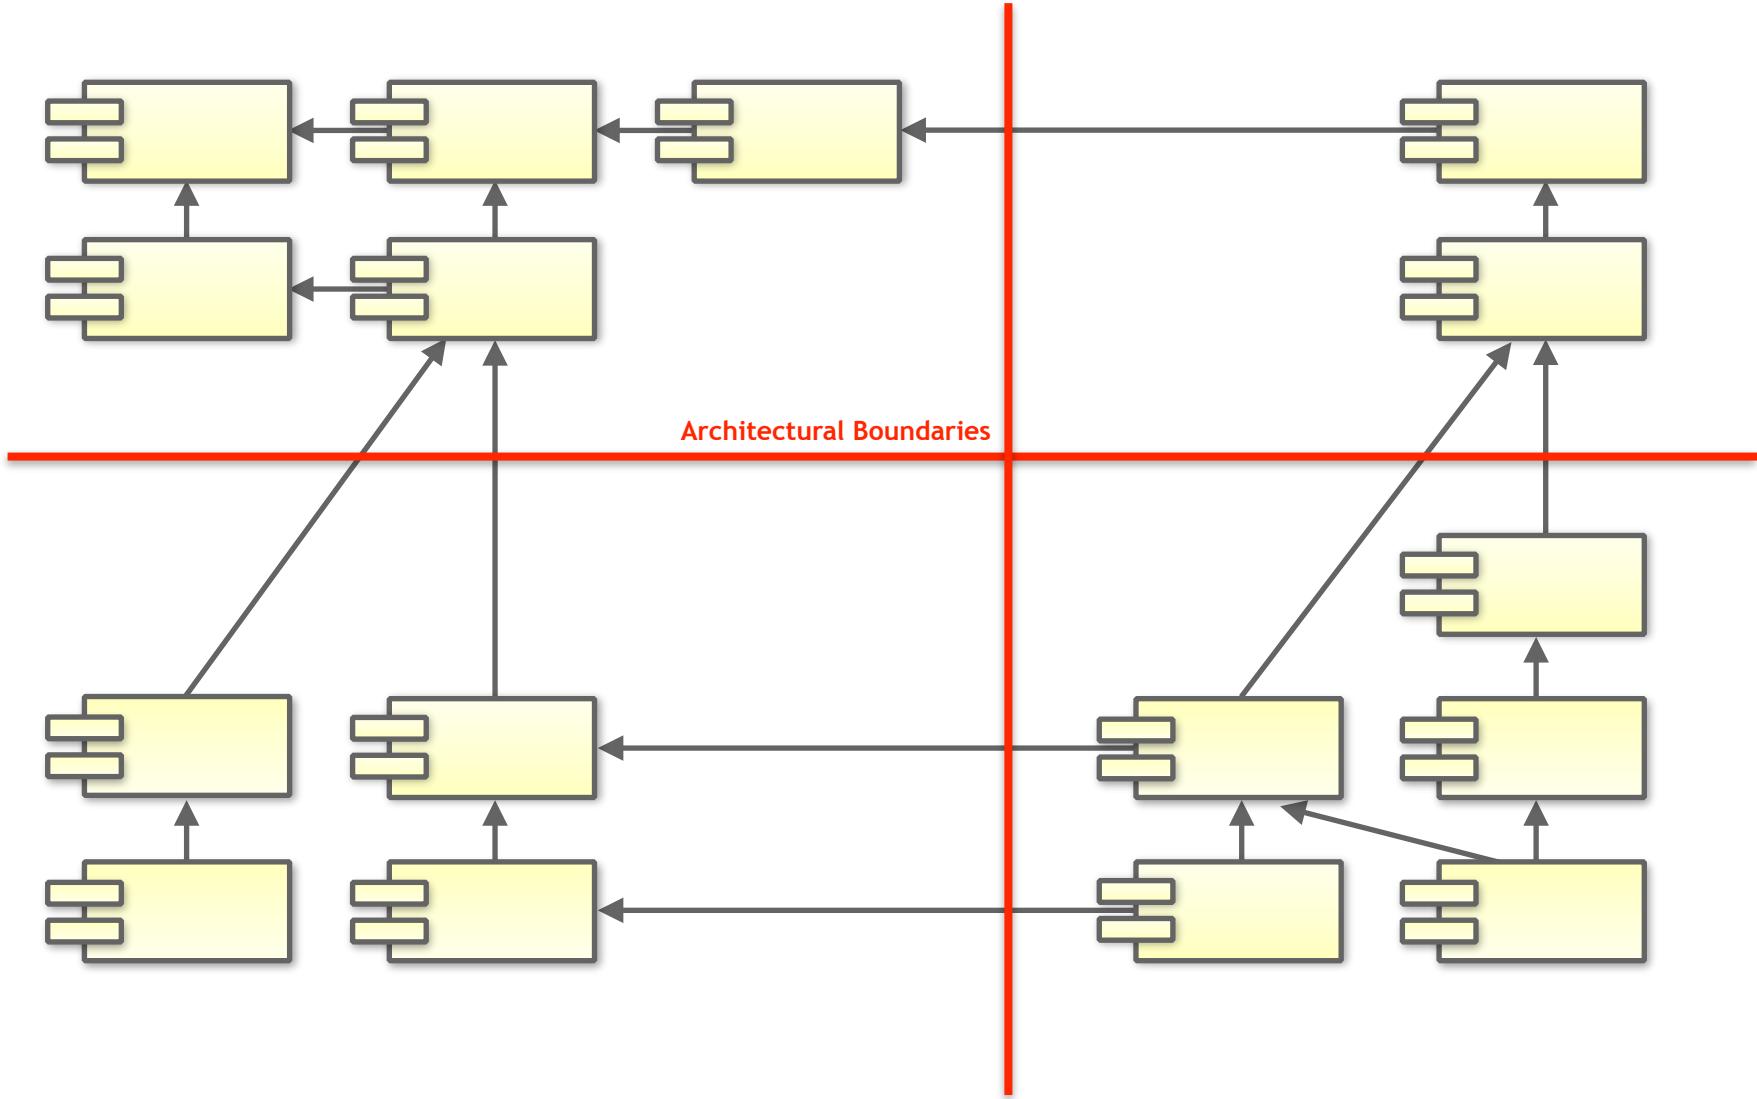

# Software Design

---

*“Dependency is the key problem in software development at all scales.”*  
*(Kent Beck, TDD by Example)*

# The SOLID Principles

---

**S**ingle-Responsibility Principle

**O**pen-Closed Principle

**L**iskov Substitution Principle

**I**nterface Segregation Principle

**D**evelopment Inversion Principle

# The SOLID Principles

---

**S**ingle-Responsibility Principle

**O**pen-Closed Principle

**L**iskov Substitution Principle

**I**nterface Segregation Principle

**D**ependency Inversion Principle



Robert C. Martin



Michael Feathers



WIKIPEDIA  
The Free Encyclopedia

Main page  
Contents  
Featured content  
Current events  
Random article  
Donate to Wikipedia  
Wikipedia store

Interaction

Help  
About Wikipedia  
Community portal  
Recent changes  
Contact page

Tools

What links here  
Related changes  
Upload file  
Special pages  
Permanent link  
Page information  
Wikidata item  
Cite this page

Print/export  
Download as PDF  
Printable version

Languages   
Ελληνικά  
Español  
Français  
हिन्दी  
Italiano  
Nederlands  
Polski

Article [Talk](#)

[Read](#) [Edit](#) [View history](#)

 Not logged in [Talk](#) [Contributions](#) [Create account](#) [Log in](#)

Search Wikipedia 



Wiki Loves Earth 2020 photo competition: take photos in nature and support Wikipedia. 

# SOLID

From Wikipedia, the free encyclopedia

(Redirected from [SOLID \(object-oriented design\)](#))

*This article is about the SOLID principles of object-oriented programming. For the fundamental state of matter, see [Solid](#). For other uses, see [Solid \(disambiguation\)](#).*

In object-oriented computer programming, **SOLID** is a mnemonic acronym for five design principles intended to make software designs more understandable, flexible and maintainable. It is not related to the **GRASP** software design principles. The principles are a subset of many principles promoted by American software engineer and instructor [Robert C. Martin](#).<sup>[1][2][3]</sup> Though they apply to any object-oriented design, the SOLID principles can also form a core philosophy for methodologies such as [agile development](#) or [adaptive software development](#).<sup>[3]</sup> The theory of SOLID principles was introduced by Martin in his 2000 paper *Design Principles and Design Patterns*,<sup>[2][4]</sup> although the SOLID acronym was introduced later by Michael Feathers.<sup>[5]</sup>

## SOLID

### Principles

Single responsibility  
Open–closed  
Liskov substitution  
Interface segregation  
Dependency inversion

[V](#) [T](#) [E](#)

## Concepts [\[edit\]](#)

### Single-responsibility principle<sup>[6]</sup>

A class should only have a single responsibility, that is, only changes to one part of the software's specification should be able to affect the specification of the class.

### Open–closed principle<sup>[7]</sup>

"Software entities ... should be open for extension, but closed for modification."

### Liskov substitution principle<sup>[8]</sup>

"Objects in a program should be replaceable with instances of their subtypes without altering the correctness of that program." See also [design by contract](#).

### Interface segregation principle<sup>[9]</sup>

"Many client-specific interfaces are better than one general-purpose interface."<sup>[4]</sup>

### Dependency inversion principle<sup>[10]</sup>

One should "depend upon abstractions, [not] concretions."<sup>[4]</sup>

## See also [\[edit\]](#)

- [Code reuse](#)
- [Inheritance \(object-oriented programming\)](#)
- [Package principles](#)
- [Don't repeat yourself](#)
- [GRASP \(object-oriented design\)](#)

# The SOLID Principles

---

I will introduce the SOLID principles ...

- ➊ ... as guidelines not limited to OO programming
- ➋ ... as general set of guidelines

# The Single-Responsibility Principle (SRP)

---

# The Single-Responsibility Principle (SRP)

---

*"The single responsibility principle states that every module or class should have responsibility over a single part of the functionality provided by the software, and that responsibility should be entirely encapsulated by the class, module or function. All its services should be narrowly aligned with that responsibility."*

*(Wikipedia)*

# The Single-Responsibility Principle (SRP)

---

*"Everything should do just one thing."*  
*(Common knowledge?)*

# The Single-Responsibility Principle (SRP)

---

*"We want to design components that are self-contained: independent, and with a single, well-defined purpose [...] cohesion). When components are isolated from one another, you know that you can change one without having to worry about the rest."*

*(Andrew Hunt, David Thomas, The Pragmatic Programmer)*

# The Single-Responsibility Principle (SRP)

---

*"Cohesion is a measure of the strength of association of the elements inside a module. A highly cohesive module is a collection of statements and data items that should be treated as a whole because they are so closely related. Any attempt to divide them up would only result in increased coupling and decreased readability."*

*(Tom DeMarco, Structured Analysis and System Specification)*

# The Single-Responsibility Principle (SRP)

---

*“A class should have only one reason to change.”*  
*(Robert C. Martin, Agile Software Development)*

# The Single-Responsibility Principle (SRP)

---

```
class Circle
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& );
    void rotate( Quaternion const& );

    void draw( Screen& s, /*...*/ );
    void draw( Printer& p, /*...*/ );
    void serialize( ByteStream& bs, /*...*/ );
    // ...

private:
    double radius;
    // ... Remaining data members
};
```

# The Single-Responsibility Principle (SRP)

---

```
class Circle
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& );
    void rotate( Quaternion const& );

    void draw( Screen& s, /*...*/ );
    void draw( Printer& p, /*...*/ );
    void serialize( ByteStream& bs, /*...*/ );
    // ...

private:
    double radius;
    // ... Remaining data members
};
```

# The Single-Responsibility Principle (SRP)

---


```
class Circle
{
public:
    // ...
    void draw( Screen& s, /*...*/ );
    void draw( Printer& p, /*...*/ );
    void serialize( ByteStream& bs, /*...*/ );
    // ...
};
```

A **Circle** changes if ...

- ➊ ... the basic properties of a circle change;
- ➋ ... the **Screen** changes;
- ➌ ... the **Printer** changes;
- ➍ ... the **ByteStream** changes;
- ➎ ... the implementation details of **draw()** change;
- ➏ ... the implementation details of **serialize()** change;
- ➐ ...


# The Single-Responsibility Principle (SRP)

---

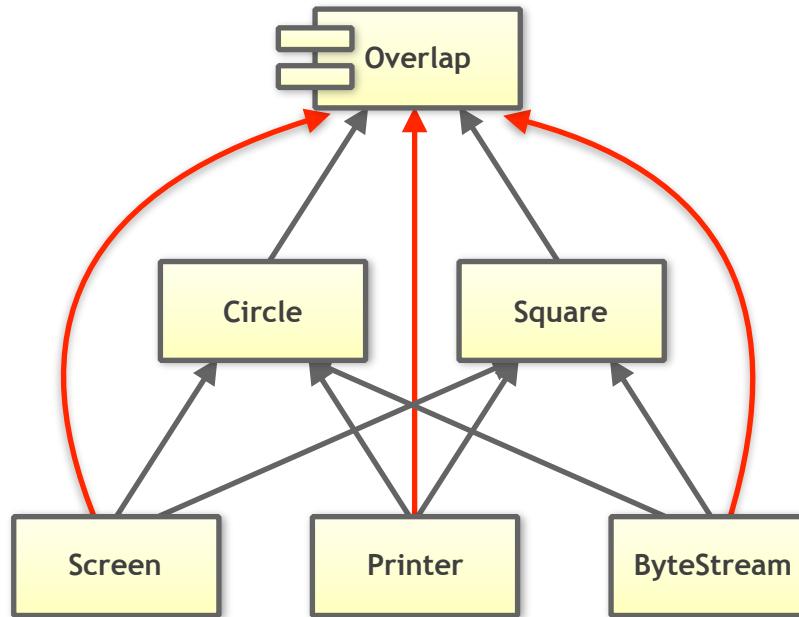

# The Single-Responsibility Principle (SRP)

---

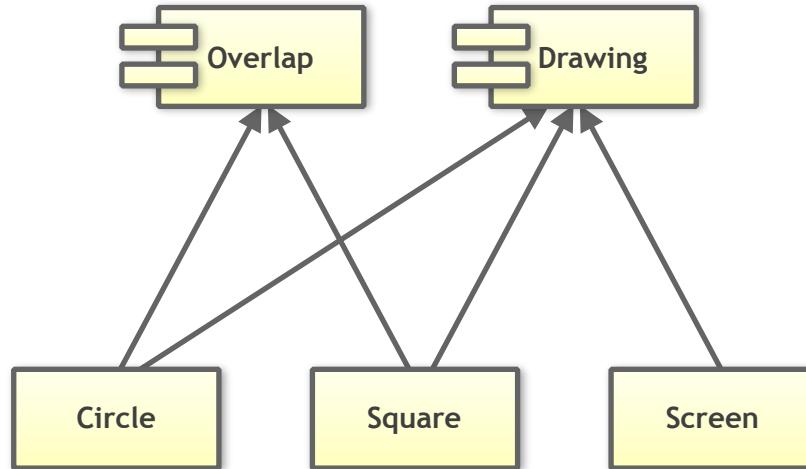

# The Single-Responsibility Principle (SRP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

The **copy()** function does not change. It ...

- ➊ ... builds on the fundamental conventions of language;
- ➋ ... does not deal with memory allocation.

# The Single-Responsibility Principle (SRP)

---

**Guideline:** Prefer cohesive software entities. Everything that does not strictly belong together, should be separated.

# The Open-Closed Principle (OCP)

---

# The Open-Closed Principle (OCP)

---

*"Software artifacts (classes, modules, functions, etc.) should be open for extension, but closed for modification."*

*(Bertrand Meyer, Object-Oriented Software Construction)*

# OCP: A Procedural Approach

---

```
enum ShapeType
{
    circle,
    square
};

class Shape
{
public:
    explicit Shape( ShapeType t )
        : type{ t }
    {}

    virtual ~Shape() = default;
    ShapeType getType() const noexcept;

private:
    ShapeType type;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : Shape{ circle }
        , radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;
}
```

# OCP: A Procedural Approach

---

```
enum ShapeType
{
    circle,
    square
};

class Shape
{
public:
    explicit Shape( ShapeType t )
        : type{ t }
    {}

    virtual ~Shape() = default;
    ShapeType getType() const noexcept;

private:
    ShapeType type;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : Shape{ circle }
        , radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;
}
```

# OCP: A Procedural Approach

---

```
enum ShapeType
{
    circle,
    square
};

class Shape
{
public:
    explicit Shape( ShapeType t )
        , type{ t }
    {}

    virtual ~Shape() = default;
    ShapeType getType() const noexcept;

private:
    ShapeType type;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : Shape{ circle }
        , radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;
}
```

# OCP: A Procedural Approach

---

```
private:  
    ShapeType type;  
};  
  
class Circle : public Shape  
{  
public:  
    explicit Circle( double rad )  
        : Shape{ circle }  
        , radius{ rad }  
        , // ... Remaining data members  
    {}  
  
    virtual ~Circle() = default;  
    double getRadius() const noexcept;  
    // ... getCenter(), getRotation(), ...  
  
private:  
    double radius;  
    // ... Remaining data members  
};  
  
void translate( Circle&, Vector3D const& );  
void rotate( Circle&, Quaternion const& );  
void draw( Circle const& );  
  
class Square : public Shape  
{  
public:  
    explicit Square( double s )  
        : Shape{ square }  
        , side{ s }  
};
```

# OCP: A Procedural Approach

---

```
void translate( Circle&, Vector3D const& );
void rotate( Circle&, Quaternion const& );
void draw( Circle const& );

class Square : public Shape
{
public:
    explicit Square( double s )
        : Shape{ square }
        , side{ s }
        , // ... Remaining data members
    {}

    virtual ~Square() = default;
    double getSide() const noexcept;
    // ... getCenter(), getRotation(), ...

private:
    double side;
    // ... Remaining data members
};

void translate( Square&, Vector3D const& );
void rotate( Square&, Quaternion const& );
void draw( Square const& );

void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        switch ( s->getType() )
        {
```

# OCP: A Procedural Approach

---

```
    double side;
    // ... Remaining data members
};

void translate( Square&, Vector3D const& );
void rotate( Square&, Quaternion const& );
void draw( Square const& );

void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        switch ( s->getType() )
        {
            case circle:
                draw( *static_cast<Circle const*>( s.get() ) );
                break;
            case square:
                draw( *static_cast<Square const*>( s.get() ) );
                break;
        }
    }
}

int main()
{
    using Shapes = std::vector<std::unique_ptr<Shape>>;
    // Creating some shapes
    Shapes shapes;
    shapes.push_back( std::make_unique<Circle>( 2.0 ) );
    shapes.push_back( std::make_unique<Square>( 1.5 ) );
}
```

# OCP: A Procedural Approach

---

```
        draw( *static_cast<Circle const>( s.get() ) );
        break;
    case square:
        draw( *static_cast<Square const*>( s.get() ) );
        break;
    }
}
}

int main()
{
    using Shapes = std::vector<std::unique_ptr<Shape>>;

    // Creating some shapes
    Shapes shapes;
    shapes.push_back( std::make_unique<Circle>( 2.0 ) );
    shapes.push_back( std::make_unique<Square>( 1.5 ) );
    shapes.push_back( std::make_unique<Circle>( 4.2 ) );

    // Drawing all shapes
    draw( shapes );
}
```

# OCP: A Procedural Approach

---

```
enum ShapeType
{
    circle,
    square,
    rectangle
};

class Shape
{
public:
    explicit Shape( ShapeType t )
        : type{ t }
    {}

    virtual ~Shape() = default;
    ShapeType getType() const noexcept;

private:
    ShapeType type;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : Shape{ circle }
        , radius{ rad }
        , // ... Remaining data members
    {}
}
```

# OCP: A Procedural Approach

---

```
private:  
    ShapeType type;  
};  
  
class Circle : public Shape  
{  
public:  
    explicit Circle( double rad )  
        : Shape{ circle }  
        , radius{ rad }  
        , // ... Remaining data members  
    {}  
  
    virtual ~Circle() = default;  
    double getRadius() const noexcept;  
    // ... getCenter(), getRotation(), ...  
  
private:  
    double radius;  
    // ... Remaining data members  
};  
  
void translate( Circle&, Vector3D const& );  
void rotate( Circle&, Quaternion const& );  
void draw( Circle const& );  
  
class Square : public Shape  
{  
public:  
    explicit Square( double s )  
        : Shape{ square }  
        , side{ s }  
};
```

# OCP: A Procedural Approach

---

```
void translate( Circle&, Vector3D const& );
void rotate( Circle&, Quaternion const& );
void draw( Circle const& );

class Square : public Shape
{
public:
    explicit Square( double s )
        : Shape{ square }
        , side{ s }
        , // ... Remaining data members
    {}

    virtual ~Square() = default;
    double getSide() const noexcept;
    // ... getCenter(), getRotation(), ...

private:
    double side;
    // ... Remaining data members
};

void translate( Square&, Vector3D const& );
void rotate( Square&, Quaternion const& );
void draw( Square const& );

void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        switch ( s->getType() )
        {
```

# OCP: A Procedural Approach

---

```
void translate( Square&, Vector3D const& );
void rotate( Square&, Quaternion const& );
void draw( Square const& );

void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        switch ( s->getType() )
        {
            case circle:
                draw( *static_cast<Circle const*>( s.get() ) );
                break;
            case square:
                draw( *static_cast<Square const*>( s.get() ) );
                break;
            case rectangle:
                draw( *static_cast<Rectangle const*>( s.get() ) );
                break;
        }
    }
}

int main()
{
    using Shapes = std::vector<std::unique_ptr<Shape>>;
    // Creating some shapes
    Shapes shapes;
    shapes.push_back( std::make_unique<Circle>( 2.0 ) );
    shapes.push_back( std::make_unique<Square>( 1.5 ) );
    // shapes.push_back( std::make_unique<Circle>( 1.0 ) );
}
```

# OCP: An Object-Oriented Approach

---

```
class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double radius;
```

# OCP: An Object-Oriented Approach

---

```
class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double radius;
```

# OCP: An Object-Oriented Approach

---

```
virtual void translate( Vector3D const& ) = 0;
virtual void rotate( Quaternion const& ) = 0;
virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double radius;
    // ... Remaining data members
};

class Square : public Shape
{
public:
    explicit Square( double s )
        : side{ s }
```

# OCP: An Object-Oriented Approach

---

```
private:  
    double radius;  
    // ... Remaining data members  
};  
  
class Square : public Shape  
{  
public:  
    explicit Square( double s )  
        : side{ s }  
        , // ... Remaining data members  
    {}  
  
    virtual ~Square() = default;  
  
    double getSide() const noexcept;  
    // ... getCenter(), getRotation(), ...  
  
    void translate( Vector3D const& ) override;  
    void rotate( Quaternion const& ) override;  
    void draw() const override;  
  
private:  
    double side;  
    // ... Remaining data members  
};  
  
void draw( std::vector<std::unique_ptr<Shape>> const& shapes )  
{  
    for( auto const& s : shapes )  
    {  
        s->draw();  
    }  
}
```

# OCP: An Object-Oriented Approach

---

```
// ... getCenter(), getRotation(), ...
```

```
void translate( Vector3D const& ) override;
void rotate( Quaternion const& ) override;
void draw() const override;
```

```
private:
```

```
    double side;
    // ... Remaining data members
```

```
};
```

```
void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        s->draw();
    }
}
```

```
int main()
```

```
{
```

```
    using Shapes = std::vector<std::unique_ptr<Shape>>;
```

```
    // Creating some shapes
```

```
    Shapes shapes;
```

```
    shapes.push_back( std::make_unique<Circle>( 2.0 ) );
```

```
    shapes.push_back( std::make_unique<Square>( 1.5 ) );
```

```
    shapes.push_back( std::make_unique<Circle>( 4.2 ) );
```

```
    // Drawing all shapes
```

```
    draw( shapes );
```

```
}
```

# OCP: An Object-Oriented Approach

---

```
void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        s->draw();
    }
}

int main()
{
    using Shapes = std::vector<std::unique_ptr<Shape>>;

    // Creating some shapes
    Shapes shapes;
    shapes.push_back( std::make_unique<Circle>( 2.0 ) );
    shapes.push_back( std::make_unique<Square>( 1.5 ) );
    shapes.push_back( std::make_unique<Circle>( 4.2 ) );

    // Drawing all shapes
    draw( shapes );
}
```

# OCP: An Object-Oriented Approach

---

```
virtual void translate( Vector3D const& ) = 0;
virtual void rotate( Quaternion const& ) = 0;
virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    virtual ~Circle() = default;

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
void draw() const override;

private:
    double radius;
    // ... Remaining data members
};

class Square : public Shape
{
public:
    explicit Square( double s )
        : side{ s }
```

# OCP: A Type-Erased Approach

---

```
class Circle
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

private:
    double radius;
    // ... Remaining data members
};

void translate( Circle const&, Vector3D const& );
void rotate( Circle const&, Quaternion const& );
void draw( Circle const& );

class Square
{
public:
    explicit Square( double s )
        : side{ s }
        , // ... Remaining data members
    {}

    double getSide() const noexcept;
}
```

# OCP: A Type-Erased Approach

---

```
class Circle
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

private:
    double radius;
    // ... Remaining data members
};

void translate( Circle const&, Vector3D const& );
void rotate( Circle const&, Quaternion const& );
void draw( Circle const& );

class Square
{
public:
    explicit Square( double s )
        : side{ s }
        , // ... Remaining data members
    {}

    double getSide() const noexcept:
```

# OCP: A Type-Erased Approach

---

```
void translate( Circle const&, Vector3D const& );
void rotate( Circle const&, Quaternion const& );
void draw( Circle const& );

class Square
{
public:
    explicit Square( double s )
        : side{ s }
        , // ... Remaining data members
    {}

    double getSide() const noexcept;
    // ... getCenter(), getRotation(), ...

private:
    double side;
    // ... Remaining data members
};

void translate( Square const&, Vector3D const& );
void rotate( Square const&, Quaternion const& );
void draw( Square const& );

class Shape
{
private:
    struct Concept
    {
        virtual ~Concept() {}
        virtual void doTranslate( Vector3D const& v ) const = 0;
    };
}
```

# OCP: A Type-Erased Approach

---

```
void translate( Square const&, Vector3D const& );
void rotate( Square const&, Quaternion const& );
void draw( Square const& );

class Shape
{
private:
    struct Concept
    {
        virtual ~Concept() {}
        virtual void do_translate( Vector3D const& v ) const = 0;
        virtual void do_rotate( Quaternion const& q ) const = 0;
        virtual void do_draw() const = 0;
        // ...
    };
};

template< typename T >
struct Model : Concept
{
    Model( T const& value )
        : object{ value }
    {}

    void do_translate( Vector3D const& v ) const override
    {
        translate( object, v );
    }

    void do_rotate( Quaternion const& q ) const override
    {
        rotate( object, q );
    }
}
```

# OCP: A Type-Erased Approach

---

```
};

template< typename T >
struct Model : Concept
{
    Model( T const& value )
        : object{ value }
    {}

    void do_translate( Vector3D const& v ) const override
    {
        translate( object, v );
    }

    void do_rotate( Quaternion const& q ) const override
    {
        rotate( object, q );
    }

    void do_draw() const override
    {
        draw( object );
    }

    // ...

    T object;
};

std::unique_ptr<Concept> pimpl;

friend void translate( Shape& shape, Vector3D const& v )
{
```

# OCP: A Type-Erased Approach

---

```
void translate( Square const&, Vector3D const& );
void rotate( Square const&, Quaternion const& );
void draw( Square const& );

class Shape
{
private:
    struct Concept
    {
        virtual ~Concept() {}
        virtual void do_translate( Vector3D const& v ) const = 0;
        virtual void do_rotate( Quaternion const& q ) const = 0;
        virtual void do_draw() const = 0;
        // ...
    };
};

template< typename T >
struct Model : Concept
{
    Model( T const& value )
        : object{ value }
    {}

    void do_translate( Vector3D const& v ) const override
    {
        translate( object, v );
    }

    void do_rotate( Quaternion const& q ) const override
    {
        rotate( object, q );
    }
}
```

# OCP: A Type-Erased Approach

---

```
// ...

T object;
};

std::unique_ptr<Concept> pimpl;

friend void translate( Shape& shape, Vector3D const& v )
{
    shape.pimpl->do_translate( v );
}

friend void rotate( Shape& shape, Quaternion const& q )
{
    shape.pimpl->do_rotate( q );
}

friend void draw( Shape const& shape )
{
    shape.pimpl->do_draw();
}

public:
    template< typename T >
    Shape( T const& x )
        : pimpl{ new Model<T>( x ) }
    {}

    // Special member functions
    Shape( Shape const& s );
    Shape( Shape&& s );
    Shape& operator=( Shape const& s );
    Shape& operator=( Shape&& s );
```

# OCP: A Type-Erased Approach

---

```
// ...

T object;
};

std::unique_ptr<Concept> pimpl;

friend void translate( Shape& shape, Vector3D const& v )
{
    shape.pimpl->do_translate( v );
}

friend void rotate( Shape& shape, Quaternion const& q )
{
    shape.pimpl->do_rotate( q );
}

friend void draw( Shape const& shape )
{
    shape.pimpl->do_draw();
}

public:
    template< typename T >
    Shape( T const& x )
        : pimpl{ new Model<T>( x ) }
    {}

    // Special member functions
    Shape( Shape const& s );
    Shape( Shape&& s );
    Shape& operator=( Shape const& s );
    Shape& operator=( Shape&& s );
```

# OCP: A Type-Erased Approach

---

```
friend void draw( Shape const& shape )
{
    shape.pimpl->do_draw();
}

public:
    template< typename T >
    Shape( T const& x )
        : pimpl{ new Model<T>( x ) }
    {}

    // Special member functions
    Shape( Shape const& s );
    Shape( Shape&& s );
    Shape& operator=( Shape const& s );
    Shape& operator=( Shape&& s );

    // ...
};

void draw( std::vector<Shape> const& shapes )
{
    for( auto const& shape : shapes )
    {
        draw( shape );
    }
}

int main()
{
```

# OCP: A Type-Erased Approach

---

```
// Special member functions
Shape( Shape const& s );
Shape( Shape&& s );
Shape& operator=( Shape const& s );
Shape& operator=( Shape&& s );

// ...
};

void draw( std::vector<Shape> const& shapes )
{
    for( auto const& shape : shapes )
    {
        draw( shape );
    }
}

int main()
{
    using Shapes = std::vector<Shape>;

    // Creating some shapes
    Shapes shapes;
    shapes.push_back( Circle{ 2.0 } );
    shapes.push_back( Square{ 1.5 } );
    shapes.push_back( Circle{ 4.2 } );

    // Drawing all shapes
    draw( shapes );
}
```

# OCP: A Type-Erased Approach

---

```
void draw( std::vector<Shape> const& shapes )
{
    for( auto const& shape : shapes )
    {
        draw( shape );
    }
}

int main()
{
    using Shapes = std::vector<Shape>;

    // Creating some shapes
    Shapes shapes;
    shapes.push_back( Circle{ 2.0 } );
    shapes.push_back( Square{ 1.5 } );
    shapes.push_back( Circle{ 4.2 } );

    // Drawing all shapes
    draw( shapes );
}
```

Powered by



StreamYard



# Embrace No-Paradigm Programming

Klaus Iglberger, London C++, April, 29th, 2020

[klaus.iglberger@gmx.de](mailto:klaus.iglberger@gmx.de)

# Design Evaluation

---

	Addition of shapes (OCP)	Addition of operations (OCP)	Separation of Concerns (SRP)	Ease of Use	Performance
Enum	1	7	5	6	9
00	8	2	2	6	6
Visitor	2	8	8	3	1
mpark::variant	3	9	9	9	9
Strategy	7	2	7	4	2
std::function	8	3	7	7	5
Type Erasure	9	4	8	8	6

1 = very bad, ..., 9 = very good

# Design Evaluation

	Addition of shapes (OCP)	Addition of operations (OCP)	Separation of Concerns (SRP)	Ease of Use	Performance
Enum	1	7	5	6	9
00	8	2	2	6	6
Visitor	2	8	8	3	1
mpark::variant	3	9	9	9	9
Strategy	7	2	7	4	2
std::function	8	3	7	7	5
Type Erasure	9	4	8	8	6

1 = very bad, ..., 9 = very good

# Design Evaluation

---

	Addition of shapes (OCP)	Addition of operations (OCP)	Separation of Concerns (SRP)	Ease of Use	Performance
OO	8	2	2	6	6
Type Erasure	9	4	8	8	6

1 = very bad, ..., 9 = very good

# OCP: A Type-Erased Approach

---

```
class Circle
{
public:
    explicit Circle( double rad )
        : radius{ rad }
        , // ... Remaining data members
    {}

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

private:
    double radius;
    // ... Remaining data members
};

void translate( Circle const&, Vector3D const& );
void rotate( Circle const&, Quaternion const& );
void draw( Circle const& );

class Square
{
public:
    explicit Square( double s )
        : side{ s }
        , // ... Remaining data members
    {}

    double getSide() const noexcept;
}
```

# Flexibility & Extensibility (OCP)



KLAUS IGLBERGER

Free Your  
Functions!

# The Open-Closed Principle (OCP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

The **copy()** function works for all copyable types. It ...

- ➊ ... works for all types that adhere to the required concepts;
- ➋ ... does not have to be modified for new types.

# The Open-Closed Principle (OCP)

---

**Guideline:** Prefer software design that allows the addition of types or operations without the need to modify existing code.

# The Liskov Substitution Principle (LSP)

---

# The Liskov Substitution Principle (LSP)

---

*"What is wanted here is something like the following substitution property: If for each object  $o_1$  of type  $S$  there is an object  $o_2$  of type  $T$  such that for all programs  $P$  defined in terms of  $T$ , the behavior of  $P$  is unchanged when  $o_1$  is substituted for  $o_2$  then  $S$  is a subtype of  $T$ ."*

*(Barbara Liskov, Data Abstraction and Hierarchy)*

Or in simplified form:

*"Subtypes must be substitutable for their base types."*

# The Liskov Substitution Principle (LSP)

---

## Behavioral subtyping (aka “IS-A” relationship)

- Contravariance of **method arguments** in a subtype
- Covariance of **return types** in a subtype
- **Preconditions** cannot be strengthened in a subtype
- **Postconditions** cannot be weakened in a subtype
- **Invariants** of the super type must be preserved in a subtype

# The Liskov Substitution Principle (LSP)

---

Which of the following two implementations would you choose?

//\*\*\*\*\* Option A \*\*\*\*\*

```
class Square
{
public:
    virtual void setWidth(double);
    virtual int getArea();
    // ...
private:
    double width;
};

class Rectangle
    : public Square
{
public:
    virtual void setHeight(double);
    // ...
private:
    double height;
};
```

//\*\*\*\*\* Option B \*\*\*\*\*

```
class Rectangle
{
public:
    virtual void setWidth(double);
    virtual void setHeight(double);
    virtual int getArea();
    // ...
private:
    double width;
    double height;
};

class Square
    : public Rectangle
{
    // ...
};
```

# The Liskov Substitution Principle (LSP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

# The Liskov Substitution Principle (LSP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

The **copy()** function works if ...

- ➊ ... the given **InputIt** adheres to the required concept;
- ➋ ... the given **OutputIt** adheres to the required concept.

# The Liskov Substitution Principle (LSP)

---

**Guideline:** Make sure that inheritance is about behavior, not about data.

**Guideline:** Make sure that the contract of base types is adhered to.

**Guideline:** Make sure to adhere to the required concept.

# The Interface Segregation Principle (ISP)

---

# The Interface Segregation Principle (ISP)

---

*"Clients should not be forced to depend on methods that they do not use."*

*(Robert C. Martin, Agile Software Development)*

# The Interface Segregation Principle (ISP)


---

*"Many client specific interfaces are better than one general-purpose interface."*

*(Wikipedia)*


# The Interface Segregation Principle (ISP)

---

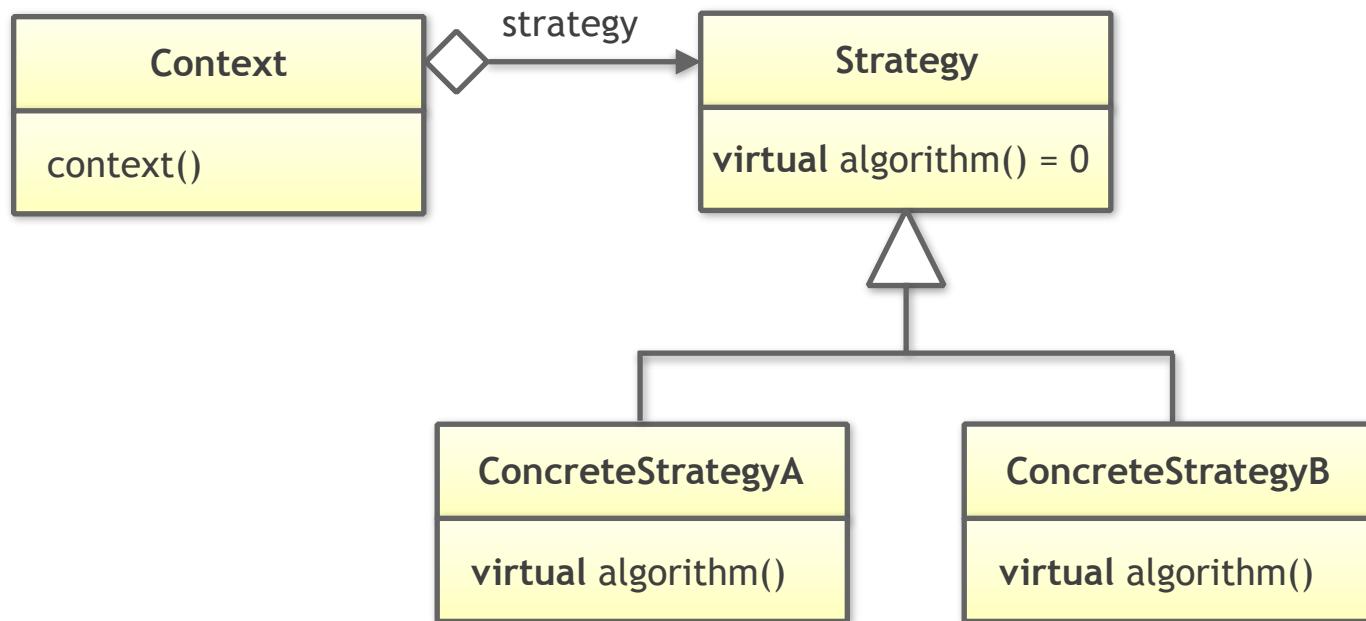

# The Interface Segregation Principle (ISP)

---

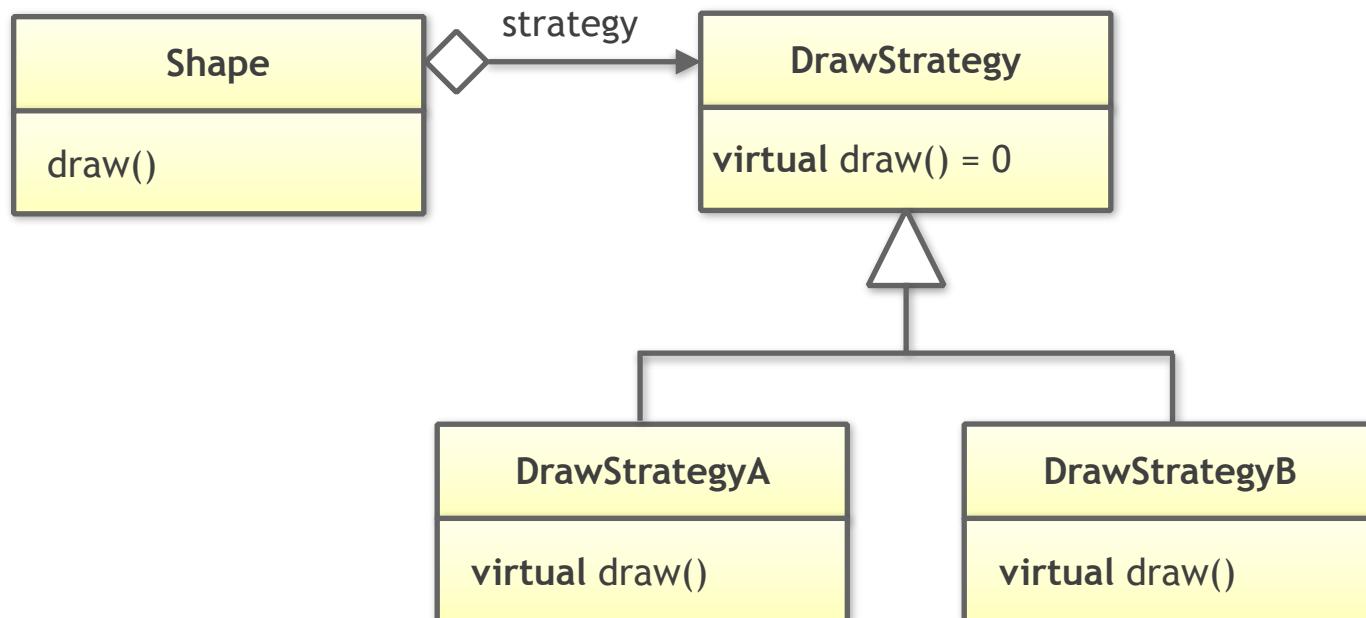

# The Interface Segregation Principle (ISP)

---

```
class Circle;
class Square;

class DrawStrategy
{
public:
    virtual ~DrawStrategy() {}

    virtual void draw( const Circle& circle ) const = 0;
    virtual void draw( const Square& square ) const = 0;
};

class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad, std::unique_ptr<DrawStrategy> ds )
        : radius{ rad }
        // Remaining data members
};
```

# The Interface Segregation Principle (ISP)

---

```
class Circle;
class Square;

class DrawStrategy
{
public:
    virtual ~DrawStrategy() {}

    virtual void draw( const Circle& circle ) const = 0;
    virtual void draw( const Square& square ) const = 0;
};

class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad, std::unique_ptr<DrawStrategy> ds )
        : radius{ rad }
        // Remaining data members
};
```

# The Interface Segregation Principle (ISP)

---

```
class DrawStrategy
{
public:
    virtual ~DrawStrategy() {}

    virtual void draw( const Circle& circle ) const = 0;
    virtual void draw( const Square& square ) const = 0;
};

class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad, std::unique_ptr<DrawStrategy> ds )
        : radius{ rad }
        , // ... Remaining data members
        , drawing{ std::move(ds) }
    {}

    virtual ~Circle() = default;
```

# The Interface Segregation Principle (ISP)

---

```
virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad, std::unique_ptr<DrawStrategy> ds )
        : radius{ rad }
        , // ... Remaining data members
        , drawing{ std::move(ds) }
    {}

    virtual ~Circle() = default;

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double radius;
    // ... Remaining data members
    std::unique_ptr<DrawStrategy> drawing;
};

class Square : public Shape
{
public:
    // ...
}
```

# The Interface Segregation Principle (ISP)

---

```
};
```

```
class Square : public Shape
{
public:
    explicit Square( double s, std::unique_ptr<DrawStrategy> ds )
        : side{ s }
        , // ... Remaining data members
        , drawing{ std::move(ds) }
    {}

    virtual ~Square() = default;

    double getSide() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double side;
    // ... Remaining data members
    std::unique_ptr<DrawStrategy> drawing;
};

void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        s->draw();
    }
}
```

# The Interface Segregation Principle (ISP)

---

```
class Circle;
class Square;

class DrawStrategy
{
public:
    virtual ~DrawStrategy() {}

    virtual void draw( const Circle& circle ) const = 0;
    virtual void draw( const Square& square ) const = 0;
};

class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad, std::unique_ptr<DrawStrategy> ds )
        : radius{ rad }
        // Remaining data members
};
```

# The Interface Segregation Principle (ISP)

---

```
class Circle;
class Square;

class DrawCircleStrategy
{
public:
    virtual ~DrawCircleStrategy() {}

    virtual void draw( const Circle& circle ) const = 0;
};

class DrawSquareStrategy
{
public:
    virtual ~DrawSquareStrategy() {}

    virtual void draw( const Square& square ) const = 0;
};

class Shape
{
public:
    Shape() = default;
    virtual ~Shape() = default;

    virtual void translate( Vector3D const& ) = 0;
    virtual void rotate( Quaternion const& ) = 0;
    virtual void draw() const = 0;
};
```

# The Interface Segregation Principle (ISP)

---

```
virtual void rotate( Quaternion const& ) = 0;
virtual void draw() const = 0;
};

class Circle : public Shape
{
public:
    explicit Circle( double rad, std::unique_ptr<DrawCircleStrategy> ds )
        : radius{ rad }
        , // ... Remaining data members
        , drawing{ std::move(ds) }
    {}

    virtual ~Circle() = default;

    double getRadius() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double radius;
    // ... Remaining data members
    std::unique_ptr<DrawCircleStrategy> drawing;
};

class Square : public Shape
{
public:
```

# The Interface Segregation Principle (ISP)

---

```
    std::unique_ptr<DrawCircleStrategy> drawing;
};

class Square : public Shape
{
public:
    explicit Square( double s, std::unique_ptr<DrawSquareStrategy> ds )
        : side{ s }
        , // ... Remaining data members
        , drawing{ std::move(ds) }
    {}

    virtual ~Square() = default;

    double getSide() const noexcept;
    // ... getCenter(), getRotation(), ...

    void translate( Vector3D const& ) override;
    void rotate( Quaternion const& ) override;
    void draw() const override;

private:
    double side;
    // ... Remaining data members
    std::unique_ptr<DrawSquareStrategy> drawing;
};

void draw( std::vector<std::unique_ptr<Shape>> const& shapes )
{
    for( auto const& s : shapes )
    {
        s->draw();
    }
}
```

# The Interface Segregation Principle (ISP)

---

```
namespace std {

template< typename InputIt, typename OutputIt >
OutputIt copy( InputIt first, InputIt last, OutputIt dest )
{
    for( ; first != last; ++first, ++dest ) {
        *dest = *first;
    }

    return dest;
}

} // namespace std
```

# The Interface Segregation Principle (ISP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

The `copy()` function ...

- ➊ ... only requires `InputIt` (minimum requirements) and ...
- ➋ ... only requires `OutputIt` (minimum requirements)

... and by that imposes minimum dependencies.

# The Interface Segregation Principle (ISP)

---

**Guideline:** Make sure interfaces don't induce unnecessary dependencies.

# The Dependency Inversion Principle (DIP)

---

# The Dependency Inversion Principle (DIP)

---

*"The Dependency Inversion Principle (DIP) tells us that the most flexible systems are those in which source code dependencies refer only to abstractions, not to concretions."*

*(Robert C. Martin, Clean Architecture)*

# The Dependency Inversion Principle (DIP)


---

- "a. High-level modules should not depend on low-level modules. Both should depend on abstractions.*
- b. Abstractions should not depend on details. Details should depend on abstractions."*

*(Robert C. Martin, Agile Software Development)*


# The Dependency Inversion Principle (DIP)

---

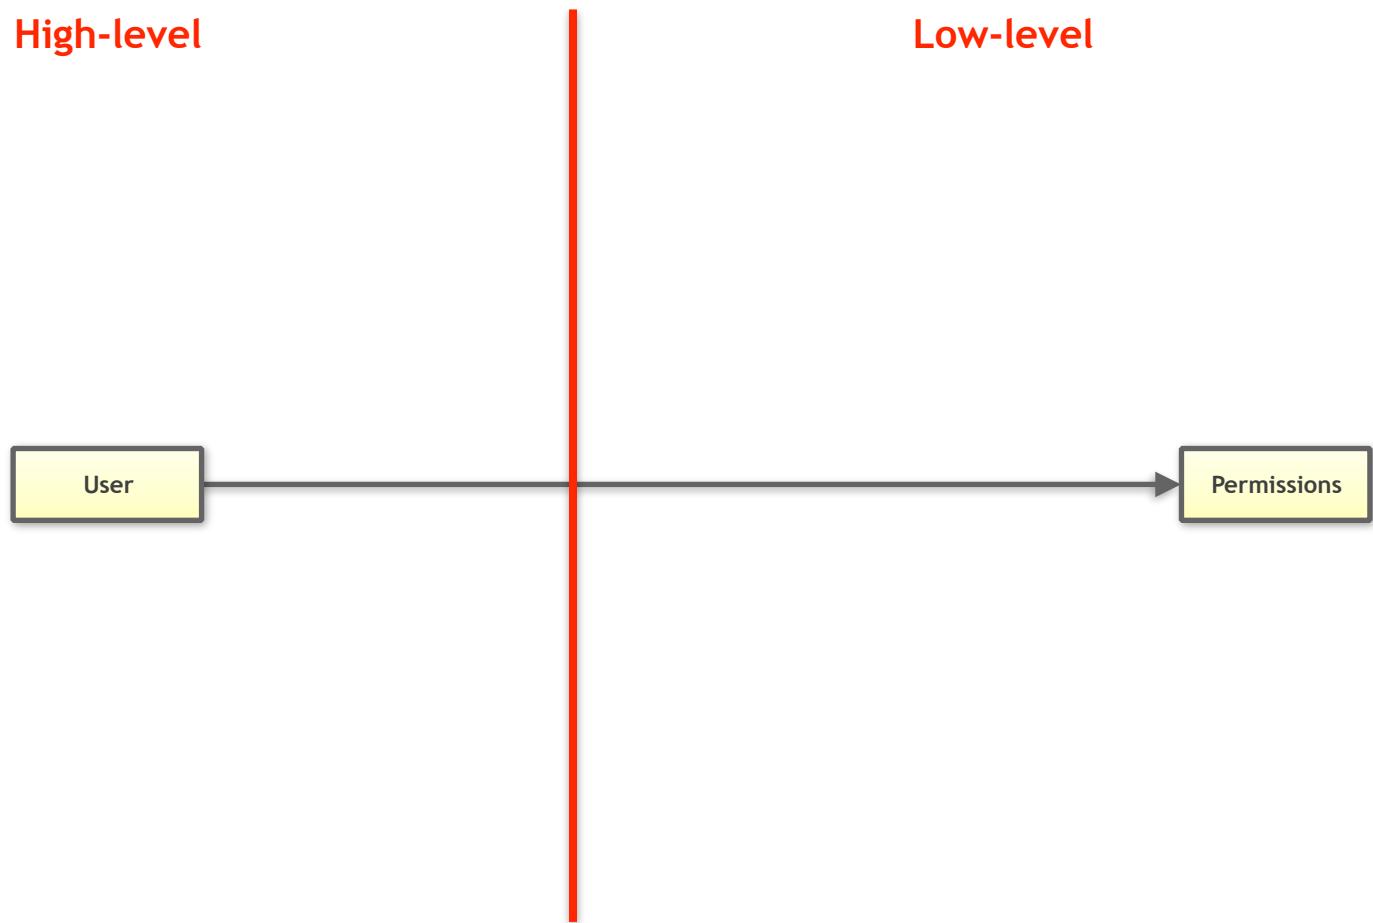


# The Dependency Inversion Principle (DIP)


---

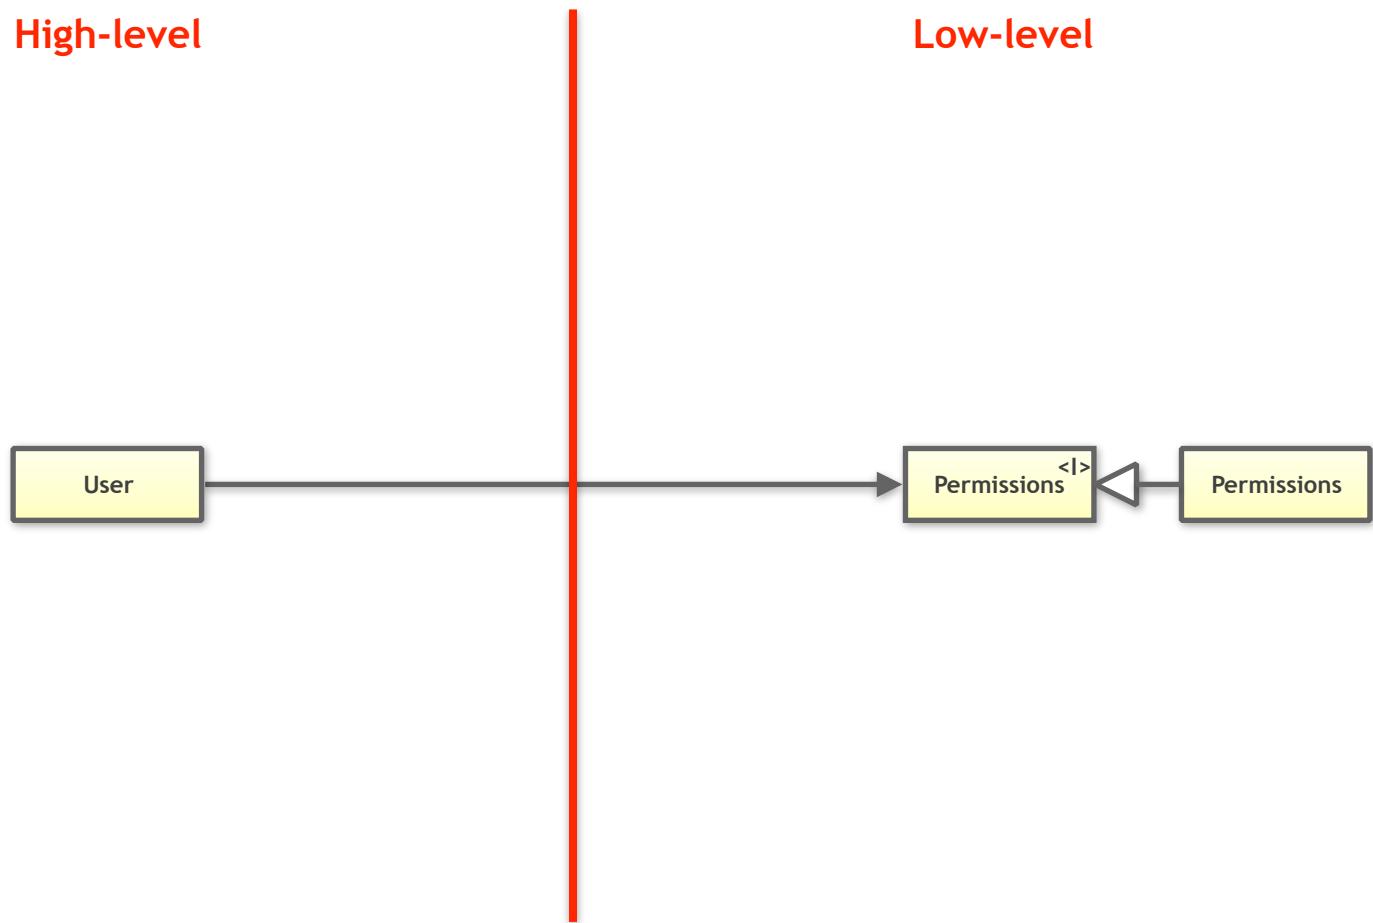

# The Dependency Inversion Principle (DIP)

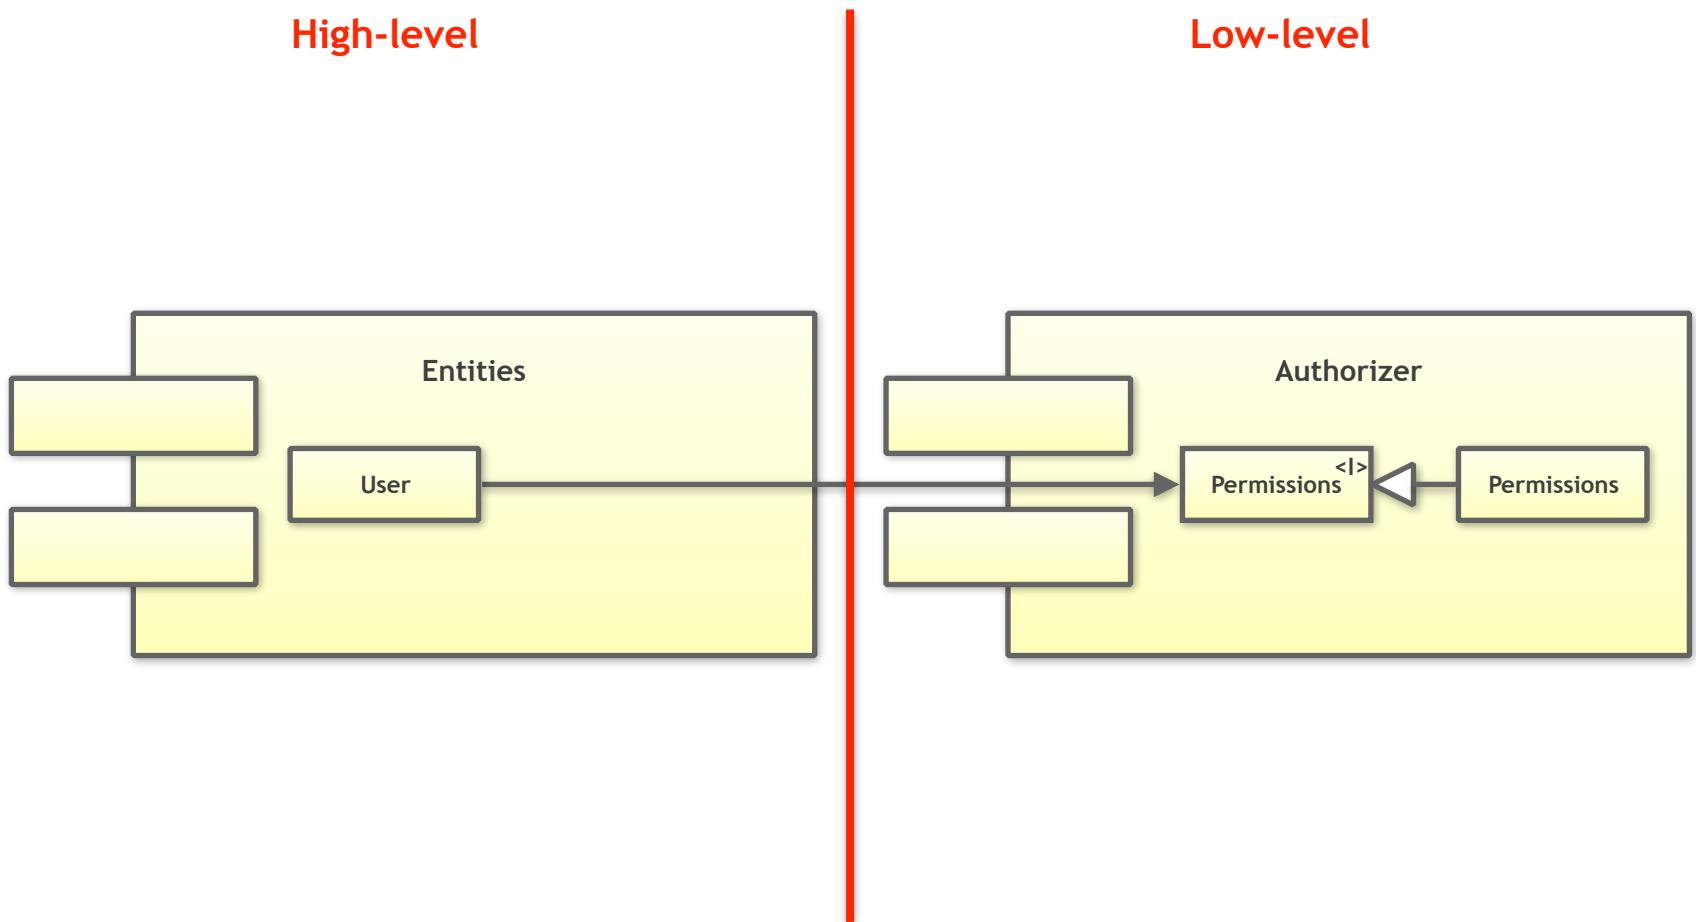

# The Dependency Inversion Principle (DIP)

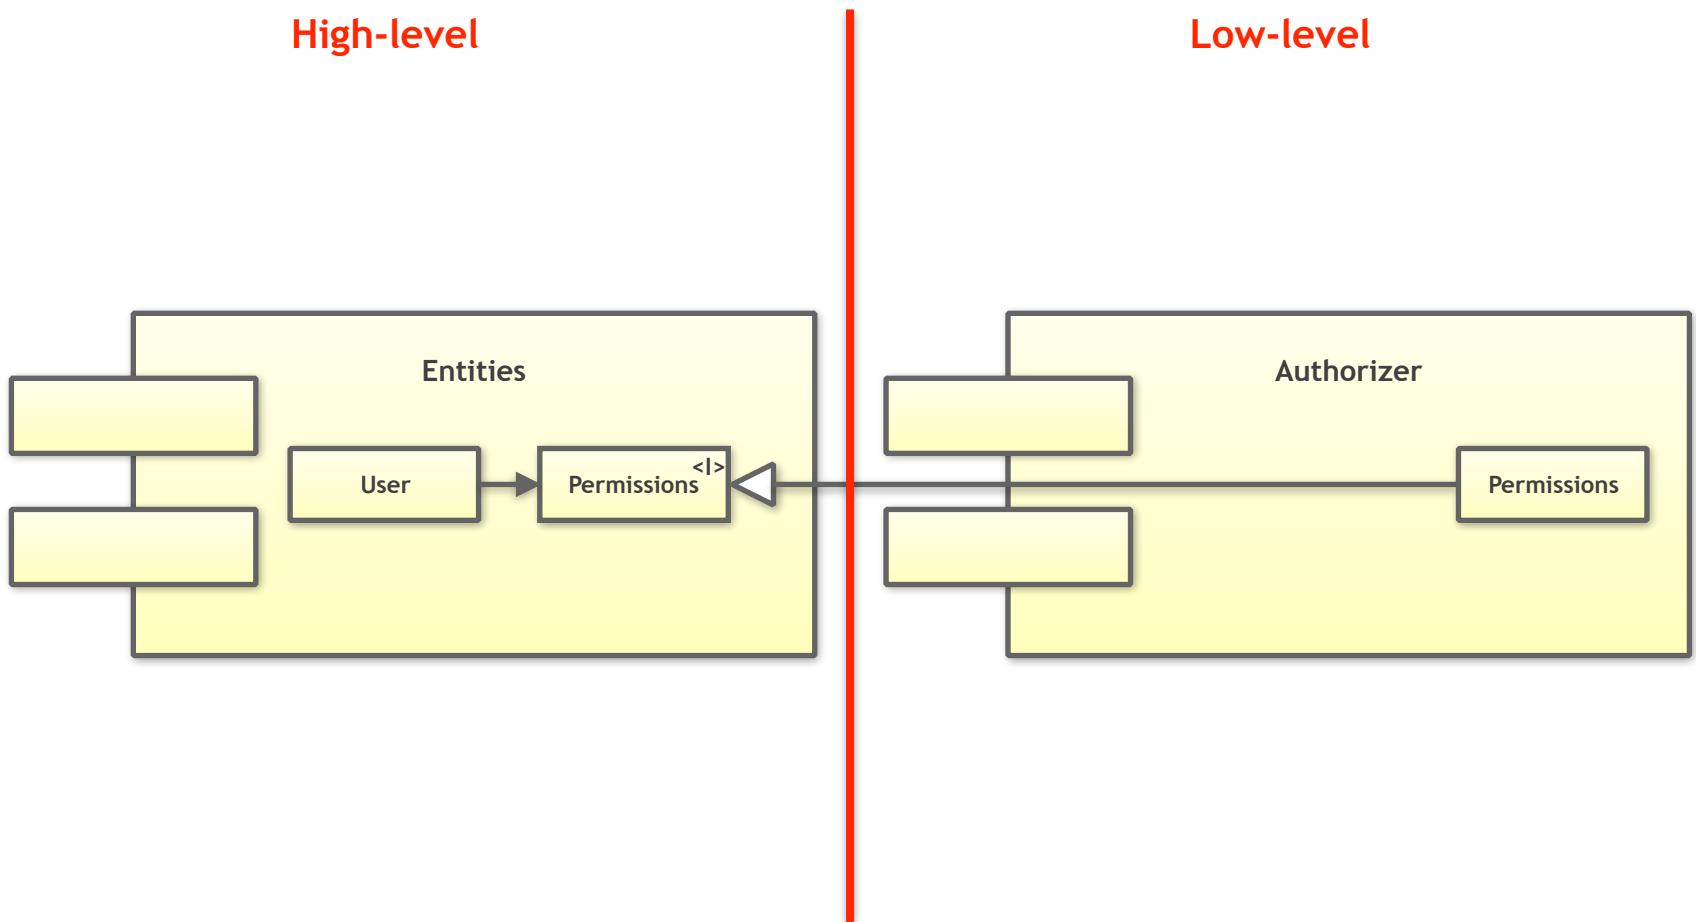

# The Dependency Inversion Principle (DIP)

Not logged in [Talk](#) [Contributions](#) [Create account](#) [Log in](#)

Article [Talk](#) Read Edit View history Search Wikipedia

## Model–view–controller

From Wikipedia, the free encyclopedia

**Model–view–controller** (usually known as MVC) is a [software design pattern](#)<sup>[1]</sup> commonly used for developing [user interfaces](#) which divides the related program logic into three interconnected elements. This is done to separate internal representations of information from the ways information is presented to and accepted from the user.<sup>[2][3]</sup> This kind of pattern is used for designing the layout of the page.

Traditionally used for desktop [graphical user interfaces](#) (GUIs), this pattern has become popular for designing [web applications](#).<sup>[4]</sup> Popular programming languages like [JavaScript](#), [Python](#), [Ruby](#), [PHP](#), [Java](#), [C#](#), and [Swift](#) have MVC frameworks that are used for web or mobile application development straight [out of the box](#).

**Contents** [hide]

- 1 Components
- 2 History
- 3 Use in web applications
- 4 Goals of MVC
  - 4.1 Simultaneous development
  - 4.2 Code reuse
- 5 Advantages & disadvantages
  - 5.1 Advantages
  - 5.2 Disadvantages
- 6 See also
- 7 References
- 8 Bibliography

The diagram illustrates the interactions within the MVC pattern. It features four main components: MODEL, VIEW, CONTROLLER, and USER. Arrows indicate the relationships: MODEL has an arrow labeled 'UPDATES' pointing to VIEW, and another arrow labeled 'MANIPULATES' pointing to CONTROLLER. VIEW has an arrow labeled 'SEES' pointing to USER, and CONTROLLER has an arrow labeled 'USES' pointing to USER.


Diagram of interactions within the MVC pattern.

### Components [edit]


#### Model

# The Dependency Inversion Principle (DIP)


---

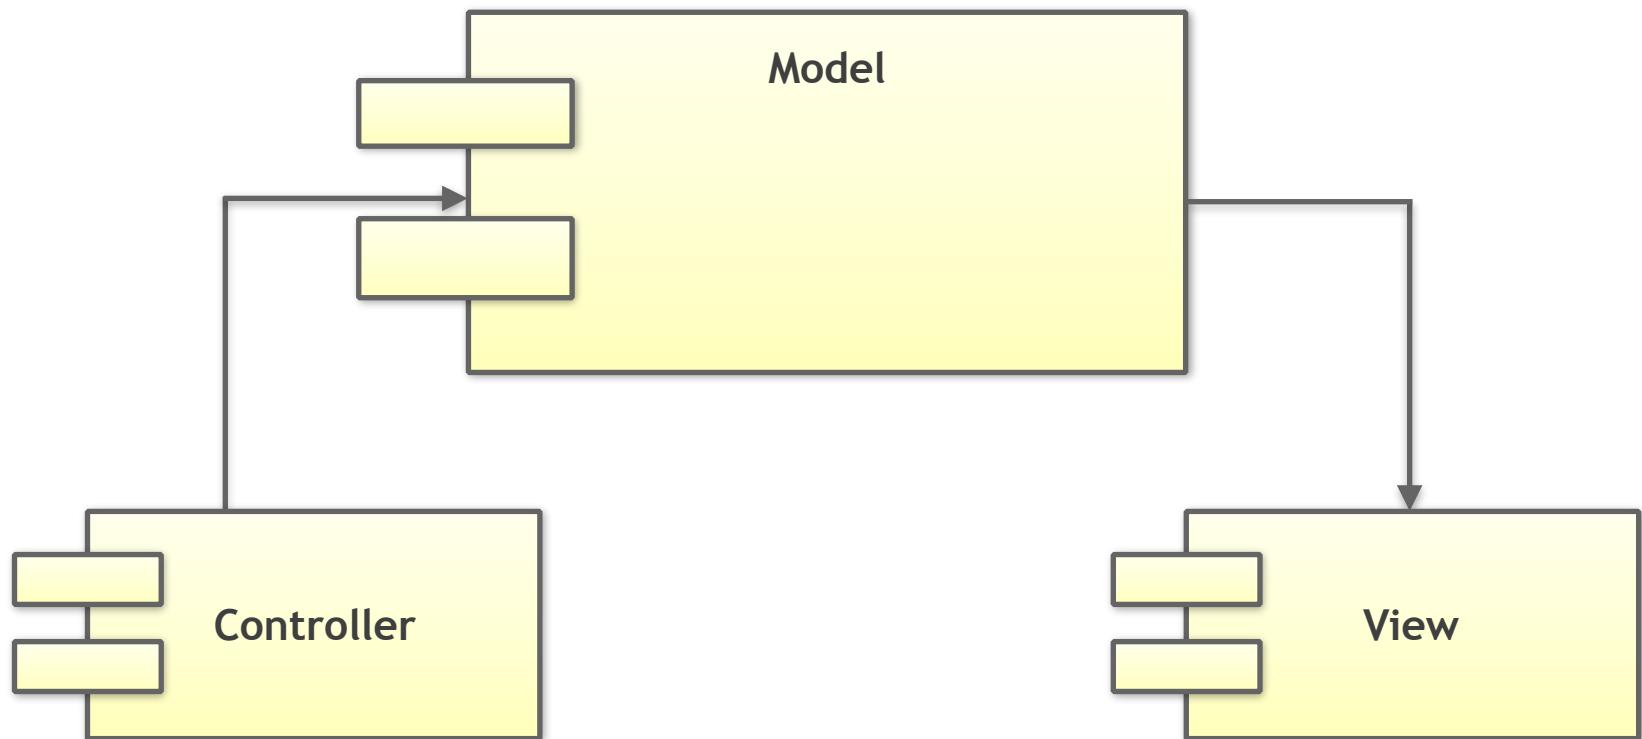

# The Dependency Inversion Principle (DIP)

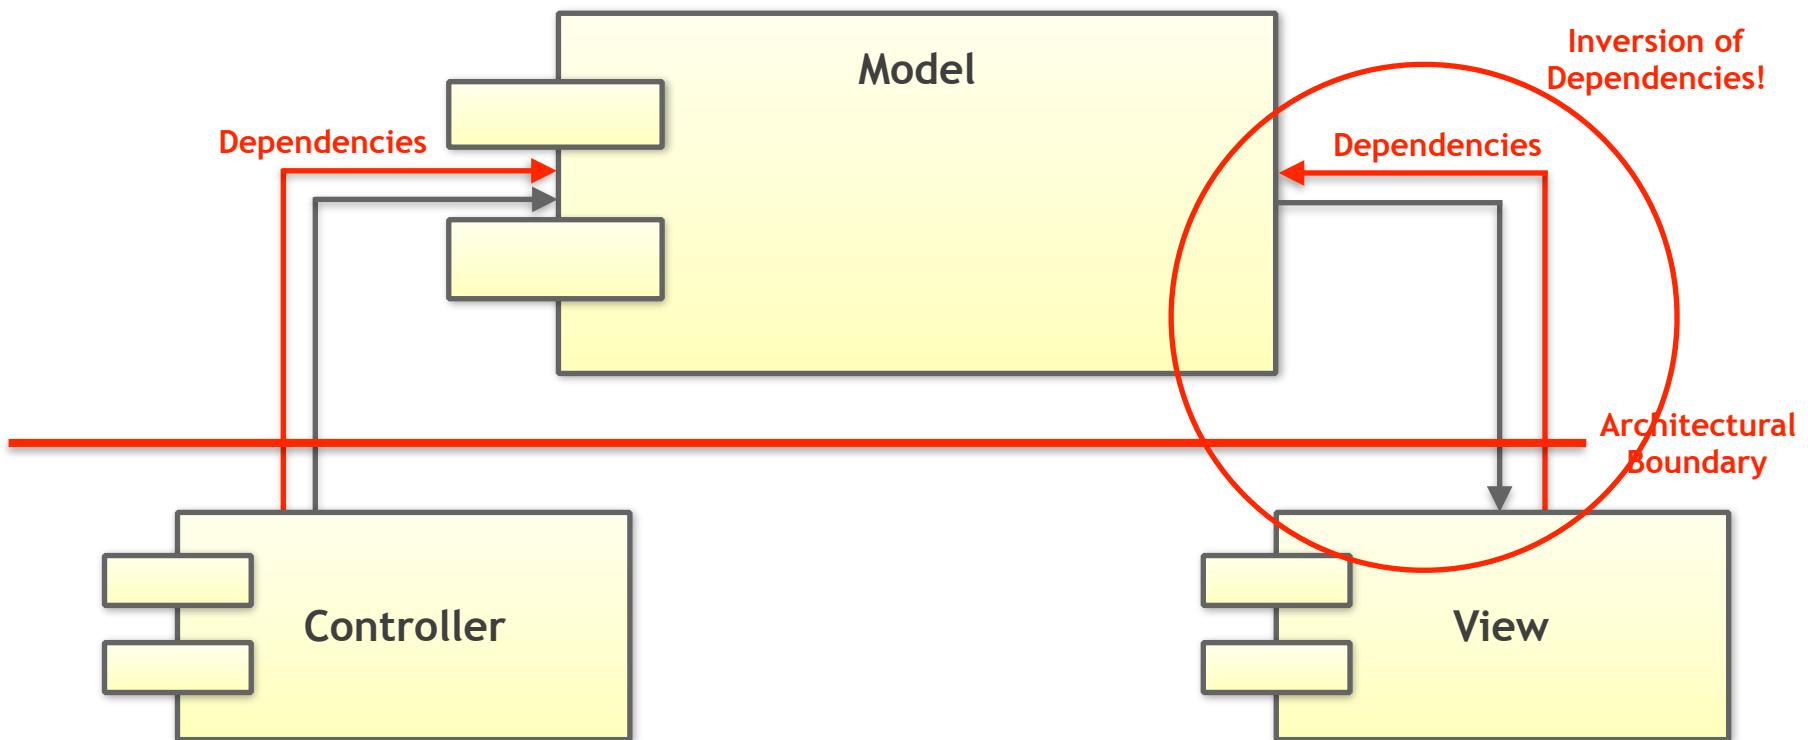

# The Dependency Inversion Principle (DIP)

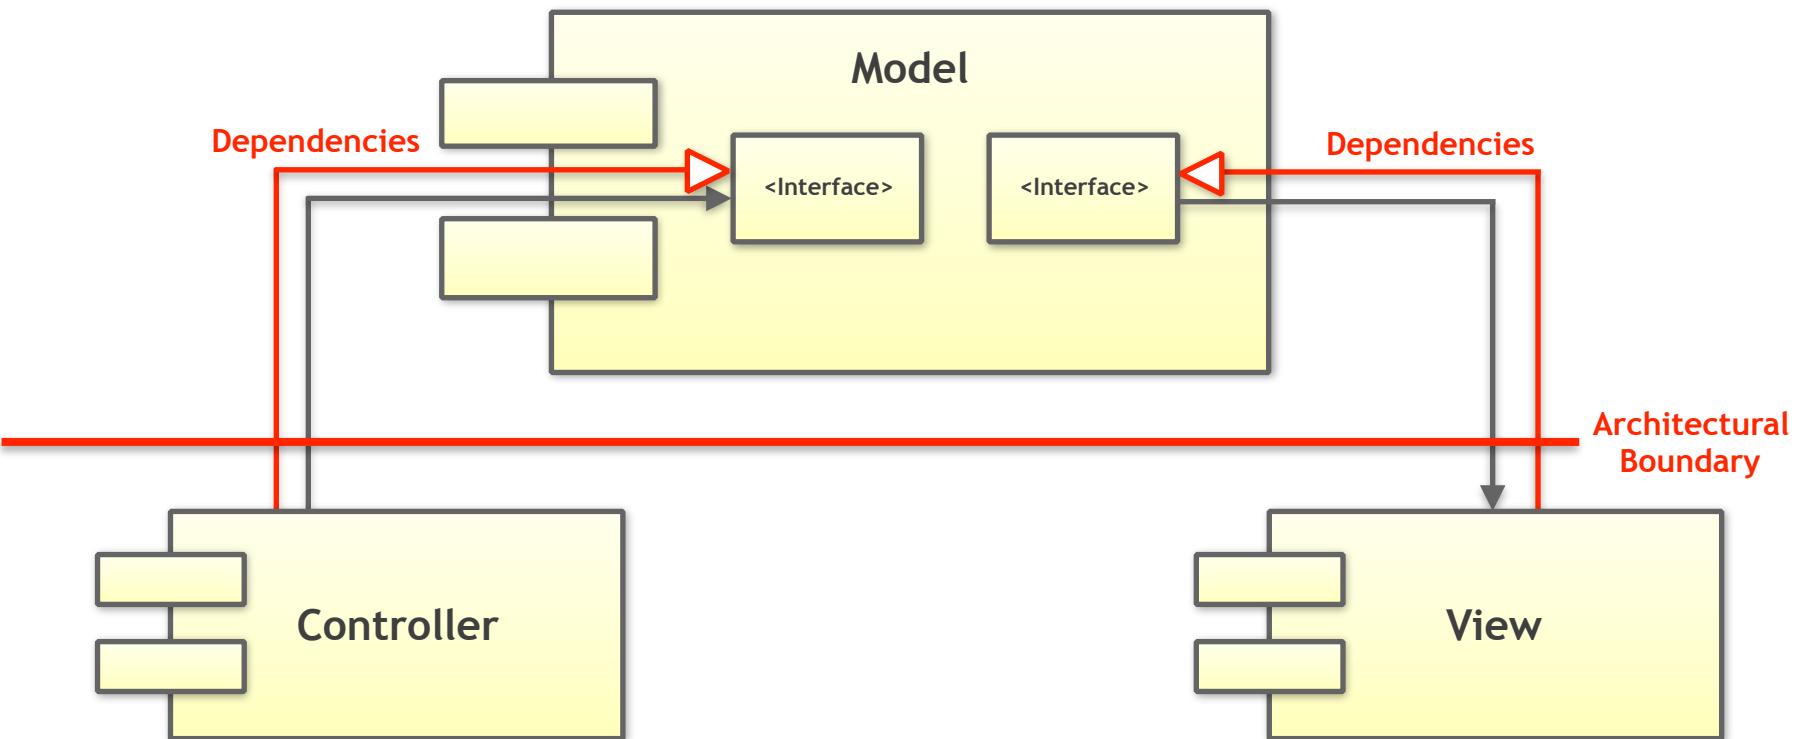

# The Dependency Inversion Principle (DIP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

# The Dependency Inversion Principle (DIP)

---

```
namespace std {  
  
template< typename InputIt, typename OutputIt >  
OutputIt copy( InputIt first, InputIt last, OutputIt dest )  
{  
    for( ; first != last; ++first, ++dest ) {  
        *dest = *first;  
    }  
  
    return dest;  
}  
  
} // namespace std
```

The `copy()` function ...

- ➊ ... is in control of its own requirements (concepts);
- ➋ ... is implemented in terms of these requirements;
- ➌ ... you depend on `copy()`, not `copy()` on you (dependency inversion).

# The Dependency Inversion Principle (DIP)

---

**Guideline:** Prefer to depend on abstractions (i.e. abstract classes or concepts) instead of concrete types.

# The SOLID Principles

---

**S**ingle-Responsibility Principle

**O**pen-Closed Principle

**L**iskov Substitution Principle

**I**nterface Segregation Principle

**D**evelopment Inversion Principle

# Summary

---

- ➊ The SOLID principles are more than just a set of OO guidelines
- ➋ Use the SOLID principles to reduce coupling and facilitate change
  - ➌ Separate concerns via the SRP to isolate changes
  - ➌ Design by OCP to simplify additions/extensions
  - ➌ Adhere to the LSP when using abstractions
  - ➌ Minimize the dependencies of interfaces via the ISP
  - ➌ Introduce abstractions to steer dependencies (DIP)

# The SOLID Principles

Klaus Iglberger, Core C++, May 2020

[klaus.iglberger@gmx.de](mailto:klaus.iglberger@gmx.de)